
TIPO GS-GRUNDFOS

TYPE GS-GRUNDFOS

Sello cartucho para bomba Grundfos series CR, CRI y CRN de tipo vertical de gran aplicacion en sistemas contra fuego, alimentador de calderas , tratamiento de aguas, hospitales, entre otros.

Cartridge Mechanical Seals, perfectly suit in the Grundfos CR,CRI, and CRN Series Vertical Multistage Centrifugal Pumps, Which are typically found in a wide range of applications, including fire fighting systems, boiler feed, drinking water, shipping, water treatment, hospitals and many more



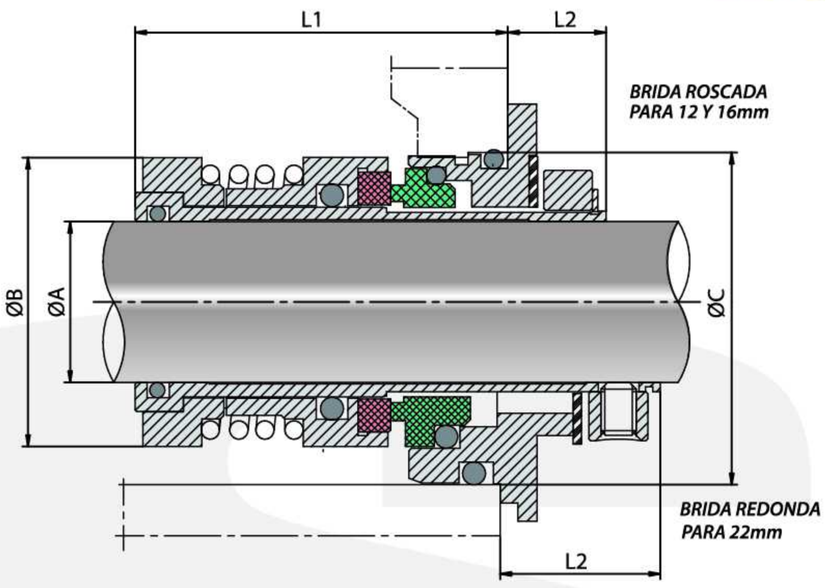



Ref	*øA*	*øB*	*øC*	*L1*	*L2*	*Thread(rosca)*
12	12	25	29	45	13.5	M28-1.5
16	16	30.5	34	46.5	13.5	M33
22	22	39.5	50	52.5	19.5	-

Medidas en milímetros / Dimensions in milimeters

COMBINACIÓN DE MATERIALES ESTANDAR

Silicio / Silicio / Viton®.
Tungsteno / Tungsteno / Viton®.

STANDARD MATERIALS

Silicon / Silicon / Viton®.
Tungsten / Tungsten / Viton®.

OPERATING RANGES

PRESSURE: *Vacumm 300psig (20 bar)*
TEMPERATURE: *-74°F to 500°F (59°C o 260°C)*
VELOCITY: *3600fpm (18 m/s)*

Viton® es una marca registrada de DuPont.

VENTAJAS

Su diseño protege las caras de contacto
Recomendado para líquidos con sólidos
Fácil montaje e instalación

BENEFITS

The design protects the seal faces
Suitable for pumping solid-containing liquids
Easy and fast service